

TECHNISCHE KARTE



WIEDERAUFLADBARE LED-SCHEINWERFER



Gemäß den Bestimmungen des WEEE-Gesetzes ist es verboten, Altgeräte, die mit dem Symbol einer durchgekreuzten Mülltonne gekennzeichnet sind, zusammen mit anderen Abfällen zu entsorgen. Der Benutzer, der elektronische und elektrische Geräte abgeben möchte, ist verpflichtet, diese an einer Sammelstelle für Altgeräte abzugeben. Das Gerät enthält keine gefährlichen Bestandteile, die sich besonders negativ auf die Umwelt und die menschliche Gesundheit auswirken.

VIDEX®



Not Dimmable



Free



IP68

GARANTIE 3 JAHRE

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevrtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Austauschbare Lichtquelle nein

Art der Lichtquelle

Dimmbar nein

Technologie LED

Elektrische Parameter

Leistung 10 W

Verbindungsschnittstelle USB-C

Photometrische Parameter

Nutzlichtstrom der Lichtquelle (Φ_{use}) 1200 Lm

Farbtemperatur des Lichts 5000K (neutralweiß)

Spitzenlichtintensität 2400 cd

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

Zusätzliche Information

Farbe des Gehäuses	Schwarz
Umgebungstemperaturbereich	-20° +40°C
Quecksilbergehalt	nein
Schutzklasse, IP	IP68
Gehäusematerial	Aviation anodized aluminum

Maße

Strichcode	4820246483094
Höhe	26 mm
Breite	90 mm
Tiefe	35 mm
Menge in der Kiste	1 pcs.
Einheit Nettogewicht	116g
Im Paket	1 Stk.

Warenkennzeichnungsschilder

Verpackungskennzeichnung CE, Entsorgungsmethode

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

VIDEX[®]

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



VIDEX®
MODEL | H065A

RECHARGEABLE ALUMINUM
LED HEADLAMP

1200
MAX LUMENS

- REPLACEABLE BATTERY
- TYPE-C
- 2m IP68
- 2m SHOCK RESISTANCE

VIDEX®
MODEL | H065A

LUMINUS SST40
10W 5000K
(Neutral White)

The LED reaches a maximum brightness of up to 1200 lumens and a beam distance of up to 100 meters. The lifetime of the LED is 50,000 hours.

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

VIDEX®
MODEL H065A

OPTICAL LENS

A frosted optical lens distributes the light, creating high beam and side low beam together. This is important when trail running or cycling.

VIDEX®
MODEL H065A

CONTROL WITH ONE SWITCH

POWER BUTTON

1. Turbo - 1200 LM
2. High - 700 LM
3. Middle - 400 LM
4. Low - 130 LM
5. Moon - 25 LM
6. SOS - Press and hold for 3 sec.

The switch has a tangible tactile response. The headlamp is easy to operate even in gloves.



VIDEX®
MODEL H065A


ALUMINUM BODY

Durable aluminum body withstands a fall from a height of 2 meters.

VIDEX®
MODEL H065A

IP68 WATER RESISTANCE

Allows short-term immersion of the device under water to a depth of up to 2 meters.

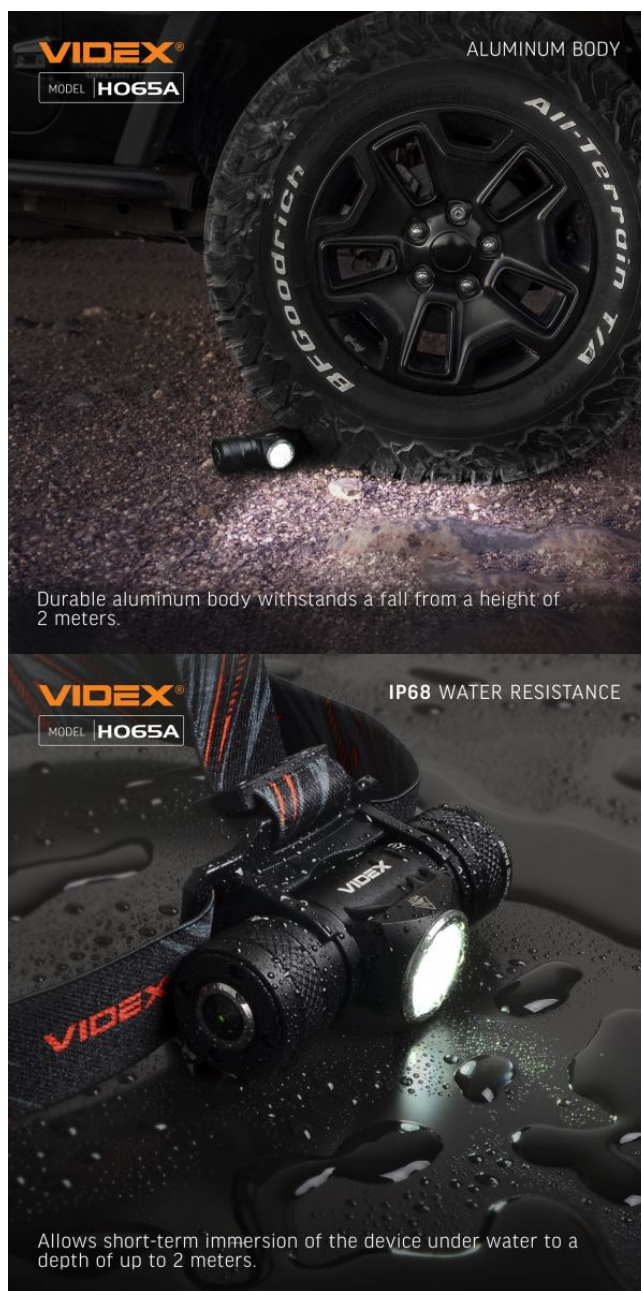

VIDEX®

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A



INDEX: VLF-H065A



VIDEX®
MODEL H065A

TYPE-C

The charging port is protected from dirt and water.



VIDEX®
MODEL H065A

CHARGE INDICATION

- 100-85% CHARGE
- 85-50% CHARGE
- 50-25% CHARGE
- 25-1% CHARGE

4-level integrated battery indication.




VIDEX®
MODEL H065A

WITH BATTERY 2200mAh

	TURBO*	HIGH	MIDDLE	LOW	MOON	SOS
OUTPUT	1200 Lm	700 Lm	400 Lm	130 Lm	25 Lm	700 Lm
RUNTIME	1h 20min	1h 30min	3h	11h	58h	2h 30min
DISTANCE	100m	70m	55m	30m	13m	70m
INTENSITY	2400cd	1300cd	770cd	240cd	45cd	1300cd

The above output parameters tested with the stock battery Videx 18650 2200mAh and may vary due to conditions and actual batteries used.

*Turbo mode output levels may be reduced by the overheat control system.



VIDEX®
MODEL H065A

PROGRAM ROOT

Start position	Action A	Result	Action B	Result
OFF	Press and hold for 0.5 sec	ON	Press and hold for 0.5 sec	OFF
ON	Click	> MOON > LOW > MIDDLE > HIGH > TURBO >		
ON/OFF	Press and hold for 3 sec	SOS	Click	Exit
OFF	Click	Battery status		
OFF	Double click	Lock	Double click	Unlock

Notes: The flashlight automatically memorizes the last selected lighting mode (excluding SOS mode) and applies it next time when turned on. Battery indication is always on if the light is switched on.

VIDEX[®]

VIDEX VLF-H065A 1200Lm 5000K

INDEX: VLF-H065A

Technische Änderungen vorbehalten. Die darin enthaltenen Daten Material ist nicht rechtlich bindend.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Polen.