

## TECHNICAL CARD



LED Plant Grow Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

# VIDEX<sup>®</sup>



120°



Ra ≥ 40



20 000 h

ON/OFF  
20 000

Not Dimmable



CCT 1200K




Free



IP20

## WARRANTY 2 YEARS

### BICOLOR



### 1200K

### Type of light source

Dimmable	no
Directional or non-directional light source	-
Mains or non-mains light source	-
Connected light source (cls)	-
Colour-tuneable light source (CTLS)	-
High luminance light source	-
Anti-glare shield	-
Technology	LED

### Electrical parameters

On-mode power (Pon)	9 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	78 mA
Displacement factor (cos φ1)	-
Survival factor	-

## VIDEX-E27-R80-9W-FITO

### INDEX: VLE-R80FF-09271

### Photometric parameters

Correlated color temperature	1200K (bicolor)
Beam angle	120°
Color rendering index (CRI)	Ra > 40
Lifetime	20000 h
On/Off cycles	20000
Useful luminous flux of the light source reference	in a wide cone (120°)
Chromaticity coordinates (x)	-
Chromaticity coordinates (y)	-
R9 colour rendering index value	-
The lumen maintenance factor	-
Colour consistency in MacAdam ellipses (SDCM)	<6 (1200K)
Flicker metric (Pst LM)	-
Stroboscopic effect metric (SVM)	-

### Additional information

Place of application	indoor
Operating temperature range	-20° +40°C
Mercury content	Does not contain
Ingress protection	IP20

### Dimensions

EAN	5904405542415
Height	115 mm
Width	80 mm

**VIDEX**<sup>®</sup>

VIDEX-E27-R80-9W-FITO


INDEX: VLE-R80FF-09271

Depth	80 mm
Outer box	20 pcs.
Unit nett weight	45g
In the package	1 pc.

### Signs marking goods

### Packaging marking

Recycling of waste, CE, Not suitable for use under moisture, Utilization

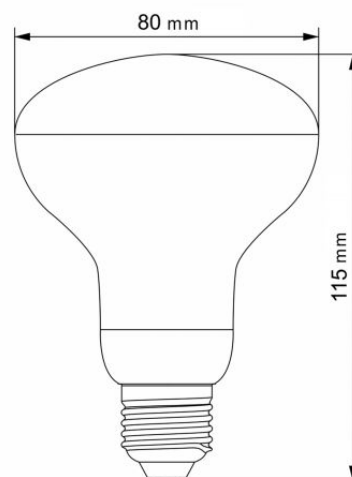

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegra opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.