

VIDEX®

VLF-M044UV




400 MAX LUMENS

Triple color light





TECHNICAL PARAMETERS / ТЕХНІЧНІ ПАРАМЕТРИ / PARAMETRY TECHNICZNE

	TOP	COB White	COB RED on	COB RED flash	COB UV
1	200 Lm	400Lm	5Lm	5Lm	-
2	5 h	2 h 30 min	37 h	39 h	4h
3	60m	30m	5m	5m	-
4	900cd	240cd	11cd	11cd	-
5	RA >95				
5	Top 6500K, COB 4000K				
6	Top CREE XTE 5W, COB 10W				
7	Li-ion 18650 3.7V				
8	Type-C, 5V 1A				
9	3.5 h				
10	IPX2				
11	1m				
12	150x38x30 mm				
13	117 g				

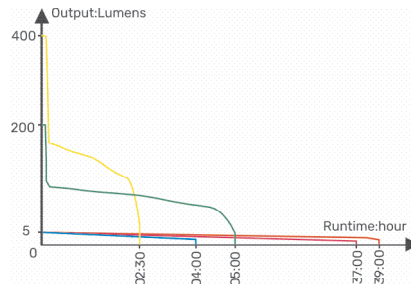

- Top light 200Lm
- COB White 400Lm
- COB RED on 5Lm
- COB RED flash 5Lm
- COB UV

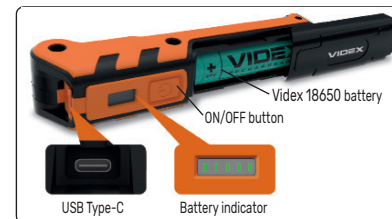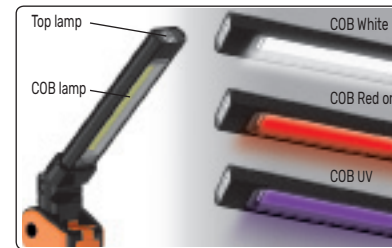

www.videx.ua

Виробник: ПП «Аллегро-опт», вул. Героїв Маріуполя, 106-Ж, м. Кропивницький, Україна, 25004. Тел./факс: +38(0522)245377.

Вироблено на виробничих потужностях: Нінхай Ісен Дейлі Юз Ко ЛТД. Адреса: Сідан Таун, Нінхай, Нінбо, Чзецзян, Китай.

Щодо прийняття претензій звертатися до Виробника.

Дата виготовлення і номер партії зазначені на виробі та на упаковці.



www.videx.com.pl

Producer/Producent: Allegro Opt Sp. z o.o., Handlowa 23, 05-120 Legionowo, Poland. Made in P.R.C.



EN MULTIPURPOSE RECHARGEABLE LED FLASHLIGHT VLF-M044UV

- Output.
- Runtime.
- Distance.
- Intensity.
- Color rendering index
- Correlated color temperature.
- LED type.
- Compatible battery.
- Charging port type, voltage and current.
- Charging time.
- Dust and moisture protection level.
- Impact resistance.
- Product sizes.
- Product weight (without battery).
- Color: black and orange.
- Optical system type: top optical lens; COB direct.
- Materials: Polyamide, Thermo Plastic Rubber/

Note: Runtime, Distance, Intensity and Charging time results have been tested with a stock battery Videx 18650 2200 mAh 3.7V. The above mentioned parameters may vary between environments and actual batteries used.

*The "Top" and "COB White" modes runtime is measured under enabled device overheat protection system, which also reduces levels of Output, Distance, and Intensity.

MAIN FEATURES

- The head vertically movable within 270 degrees;
- The head with two separate light sources.
- High color transmission grade white light, UV light, red constant and signal light are built-in the one COB lamp;
- White light with dimming function
- Base magnet or metal hanging loop for various ways mounting;

INCLUDED

- Flashlight VLF-M044UV;
- Li-ion 18650 battery 2200 mAh;
- Charging cable
- User's manual.

LIGHTING MODES

- Top** - the top lamp white light mode
- COB White** - the COB lamp white light mode
- COB Red on** - the COB lamp red constant light mode
- COB red flash** - the COB lamp red flashing light mode
- COB UV** - the COB lamp ultraviolet light mode

OPERATING INSTRUCTION

Short press Button - turn on the light, switch between modes "Top" and "COB White" and turn off the light cyclically. Long press button with the white light switched on - dimming Double pressing of the button - activation of the group of modes «COB Red on», «COB red flash» and «COB UV». Short press to cycle between these modes. Double press again turns off the flashlight. Note. The modes selection performs within 5 seconds. After this time, the next short press will turn the light off.

BATTERY STATUS INDICATION

With the light switched off, press and hold the button for 2 second to see the battery status. The indication will last as long as you hold the button. The battery status is also continuously displayed when the light is turned on.
5 divisions - <100% charge;
4 divisions - <80% charge;
3 divisions - <60% charge;
2 divisions - <40% charge;
1 division - <20% charge;
1 division flashes - battery discharged.

CHARGING

Plug the USB-A socket of the charging cable into electrical outlet. Switch off the light, open the protective cover and connect the

charging cable to the flashlight port. When charging, the indicator's divisions flash alternately. When fully charged, all 5 divisions of the indicator glow constantly. After a full charge, unplug the charging cable and close the protective cover to prevent water and dust from entering the flashlight body. © The original batteries are supplied charged and can be used immediately after purchase, however it is recommended that the rechargeable battery be fully charged before first use. The battery needs to be charged in time before it is completely discharged. During long periods of storage, it is recommended to keep the battery at about half capacity to extend its life time.

BATTERY REPLACEMENT

- Unscrew the screw located near the magnet using Phillips screwdriver;
- Slide the battery cover down;
- Insert the battery the "+" contact is directed to the ON/OFF button;
- Close the battery cover, tighten the screw back and test the flashlight.

MAINTENANCE AND SAFETY INSTRUCTIONS

- For long-term storage, it is necessary to remove the batteries from the flashlight to avoid leakage.
- It is recommended to keep the battery contacts clean to maintain the original performance.

- ATTENTION.** Avoid direct light into eyes as it may cause the eyes damage.
- Do not use batteries other than those specified in the technical specifications.
- Do not disassemble the sealed body of the flashlight as this may compromise performance and void the warranty.
- Keep out of the reach of children.

WARRANTY

The warranty for the flashlight is 3 years, for the battery - 1 year. The warranty does not cover accessories. The LED source inside the flashlight is not replaceable. If the LED fails, the whole flashlight should be replaced. During the warranty period, a faulty flashlight can be exchanged or returned subject to the following conditions:
- The instructions for use in this manual have been followed;
- There are no signs of deep mechanical damage on the product;
- A receipt and accessories have been saved.

ENVIRONMENTAL PROTECTION

Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

The producer shall not be responsible for any damage resulting from the failure to follow above instructions. The producer reserves the right to make updates of this user's manual.

